

Polymer PTC Resettable 130V Series

Features:

- Radial leaded Devices
- Cured, flame retardant epoxy polymer insulating material meets UL94V-0
- Rohs compliant and lead-free
- Agency recognition

Product Dimensions




Fig1

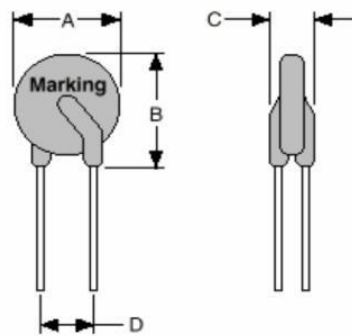


Fig2

Unit : mm

Model	Dimensions (mm)				Lead material	Shape
	A(max)	B(max)	C(max)	D(typ)	Tinned matel(mm)	Fig
130V-010	7.4	12.7	3.8	5.1	22AWG/Φ0.6	1
130V-015	7.4	13.0	3.8	5.1	22AWG/Φ0.6	1
130V-017	7.4	13.5	3.8	5.1	22AWG/Φ0.6	1
130V-020	7.6	13.5	3.8	5.1	22AWG/Φ0.6	1
130V-025	7.6	13.5	3.8	5.1	22AWG/Φ0.6	1
130V-030	8.0	14.0	3.8	5.1	22AWG/Φ0.6	1
130V-040	9.4	15.0	3.8	5.1	22AWG/Φ0.6	1
130V-050	10.2	15.2	3.8	5.1	22AWG/Φ0.6	1
130V-065	12.8	18.0	3.8	5.1	22AWG/Φ0.6	1
130V-075	12.8	18.0	3.8	5.1	22AWG/Φ0.6	1
130V-090	14.5	19.6	3.8	5.1	20AWG/Φ0.8	2
130V-110	16.3	21.3	3.8	5.1	20AWG/Φ0.8	2
130V-135	17.0	22.0	3.8	5.1	20AWG/Φ0.8	2
130V-160	20	25	3.8	5.1	20AWG/Φ0.8	2
130V-185	22	23	3.8	5.1	20AWG/Φ0.8	2
130V-200	25	27	3.8	10.2	20AWG/Φ0.8	2
130V-250	27	32	3.8	10.2	20 AWG/Φ0.8	2

Note: ① Dimensions A, B, C is the maximum size, D values are typical tolerance of ± 0.75mm

Thermal Derating Chart-IH (A)

Model	Maximum ambient operating temperatures (°C)								
	-40	-20	0	25	40	50	60	70	85
130V-010	0.15	0.13	0.12	0.10	0.085	0.076	0.067	0.060	0.047
130V-015	0.22	0.20	0.18	0.15	0.013	0.011	0.10	0.09	0.07
130V-017	0.25	0.22	0.20	0.17	0.14	0.13	0.11	0.10	0.08
130V-020	0.29	0.26	0.24	0.20	0.17	0.15	0.13	0.12	0.09
130V-025	0.37	0.33	0.30	0.25	0.21	0.19	0.17	0.15	0.12
130V-030	0.44	0.40	0.35	0.30	0.26	0.23	0.20	0.18	0.14
130V-040	0.59	0.53	0.47	0.40	0.34	0.30	0.27	0.24	0.19
130V-050	0.74	0.66	0.59	0.50	0.43	0.38	0.34	0.30	0.24
130V-065	0.96	0.86	0.77	0.65	0.55	0.49	0.44	0.39	0.31
130V-075	1.10	0.99	0.89	0.75	0.64	0.57	0.50	0.45	0.35
130V-090	1.32	1.19	1.06	0.90	0.77	0.68	0.60	0.54	0.42
130V-110	1.62	1.45	1.30	1.10	0.94	0.84	0.74	0.66	0.52
130V-135	1.98	1.78	1.59	1.35	1.15	1.03	0.90	0.81	0.63
130V-160	2.35	2.11	1.89	1.60	1.36	1.22	1.07	0.96	0.75
130V-185	2.72	2.44	2.18	1.85	1.57	1.41	1.24	1.11	0.87
130V-200	2.94	2.64	2.36	2.00	1.70	1.52	1.34	1.20	0.94
130V-250	3.68	3.30	2.95	2.50	2.13	1.90	1.68	1.50	1.18

Electrical Characteristic

Model	I _{Hold} (A)	I _{Trip} (A)	V _{max}	I _{max}	Pd _{Max}	Maximum Time to Trip		Resistance (Ω)	
			(V)	A	W	Current (A)	Time (S)	Rmin	Rmax
130V-010	0.10	0.20	130	3	0.8	0.5	6	2.5	9.0
130V-015	0.15	0.30	130	3	0.8	0.75	5.5	2.5	7.5
130V-017	0.17	0.34	130	3	0.8	0.85	5.2	1.5	7.0
130V-020	0.20	0.40	130	3	0.8	1.0	5.0	1.9	4.0
130V-025	0.25	0.50	130	3	1.0	1.25	4.8	1.45	3.50
130V-030	0.30	0.60	130	3	1.0	1.5	4.5	1.0	3.0
130V-040	0.40	0.80	130	3	1.0	2.0	4.5	0.75	2.0
130V-050	0.50	1.0	130	3	1.0	2.5	5.0	0.50	1.60
130V-065	0.65	1.3	130	10	1.0	3.25	5.2	0.45	1.0
130V-075	0.75	1.5	130	10	1.0	3.75	5.5	0.40	0.90
130V-090	0.90	1.8	130	10	1.5	4.5	5.8	0.30	0.70
130V-110	1.10	2.2	130	10	1.8	5.5	6.3	0.20	0.65
130V-135	1.35	2.7	130	10	1.8	6.75	7.5	0.15	0.60
130V-160	1.60	3.2	130	10	2.0	8.0	8	0.10	0.50

130V-185	1.85	3.7	130	10	2.0	9.25	9	0.10	0.40
130V-200	2.00	4.0	130	10	2.2	10.0	10	0.10	0.30
130V-250	2.50	5.0	130	10	2.5	12.5	12	0.05	0.25


Test Procedures And Requirements

Test	Test Conditions	Accept/Reject Criteria
Resistance	In still air @ 25°C	$R_{min} \leq R \leq R_{max}$
Time to Trip	Specified current, V_{max} , 25°C	$T_{maximum}$ Time to Trip
Hold Current	60min, at IH	No trip
Trip Cycle Life	V_{max} , I_{max} , 100cycles	No arcing or burning
Trip Endurance	V_{max} , 24hours	No arcing or burning

Physical Characteristics and Environmental Specifications

Test	Conditions	Resistance change
Passive aging	+85°C, 1000hrs	±8% typical
Humidity aging	+85°C, 85%R.H.1000hrs	±8% typical
Thermal shock	+125°C to -55°C, 10times	±12% typical
Resistance to solvent	MIL-STD-202, Method 215	No change
Vibration	MIL-STD-202, Method 201	No change

Operation Condition

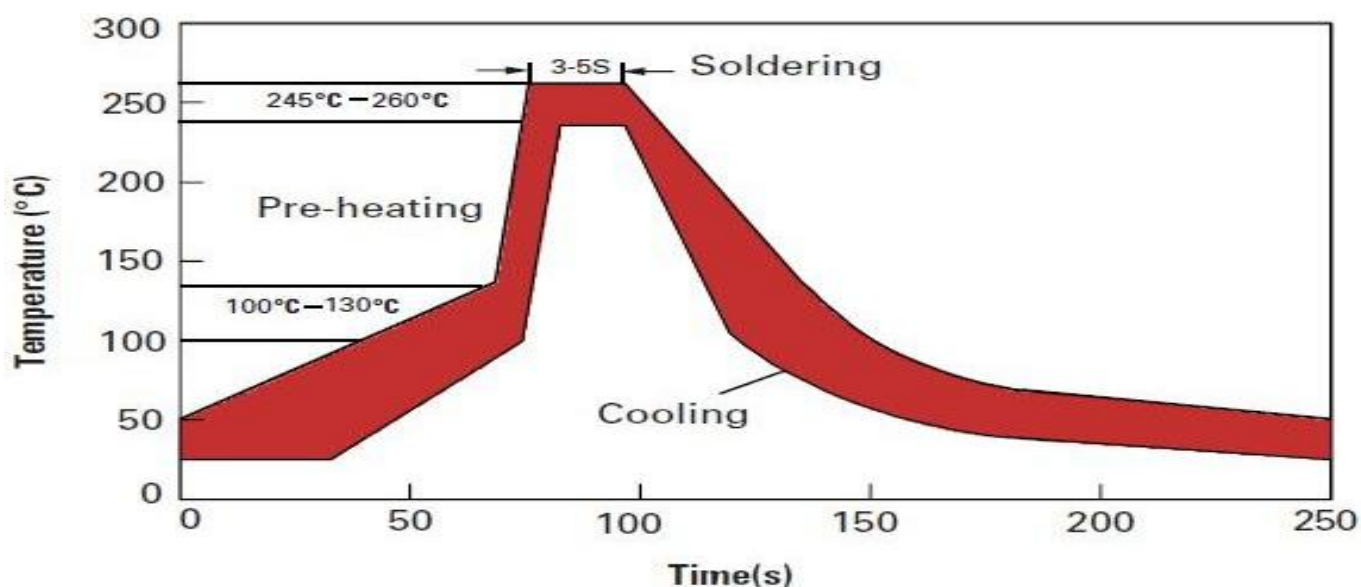

recommended curve

1. Ambient temperature: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
2. Humidity: $\leq 95\% \text{HR}(40^{\circ}\text{C})$
3. Atmospheric pressure: 86Kpa $\sim$ 106Kpa.
4. Vibration frequency: 10Hz $\sim$ 50Hz.
5. Acceleration: 98m/s².
6. Storage temperature: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
7. Soldering
 - 7.1 Wave Soldering:
Soldering Temperature: $260^{\circ}\text{C} \sim 270^{\circ}\text{C}$
Soldering Time: $\leq 3\text{sec}$.
Soldering Position: Resettable fuse wire and the bottom $\geq 6\text{mm}$.
 - 7.2 Manual soldering
Soldering Temperature: $250^{\circ}\text{C} \sim 280^{\circ}\text{C}$
Soldering Time: $\leq 3\text{sec}$.
Soldering Position: Resettable fuse wire and the bottom $\geq 6\text{mm}$.

Electrical Specifications:

I_H =Hold current: maximum current at which the device will not trip at 25°C still air.

I_T =Trip current: minimum current at which the device will trip at 25°C still air.

V_{max} =Maximum voltage device can withstand without damage at rated current.

I_{max} =Maximum fault current device can withstand without damage at rated voltage.

T_{trip} =Maximum time to trip(s) at assigned current.

P_d =Typical power dissipation: typical amount of power dissipated by the device when in state air environment.

R_{min} =Minimum device resistance at 25°C prior to tripping.

R_{max} =Maximum device resistance at 25°C prior to tripping.

Warning:

PPTC devices are intended for protection against occasional over-current or over-temperature fault conditions, and should not be used when repeated fault conditions are anticipated. Operation beyond maximum ratings of improper use may result in device damage and possible electrical arcing and flame.

Notes:

The specification is intended to present application, product and technical data to assist the user in selecting PPTC circuit protection devices. However, users should independently evaluate and test the suitability of each product. YINT makes no warranties as to the accuracy or completeness of the information and disclaims any liability resulting from its use. YINT's only obligations are those in the YINT Standard Terms and Conditions of Sale and in no case will YINT be liable for any incidental, indirect, or consequential damages arising from the sale, resale, or misuse of its products. YINT reserves the right to change or update, without notice, any information contained in this specification.