


US2ABF THRU US2MBF

Features

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- High efficiency
- Lead free in comply with EU RoHS 2011/65/EU directives

Mechanical Data

- Case:SMBF
- Terminals: Solderable per MIL-STD-750, Method 20
- Approx. Weight: 57mg / 0.002oz

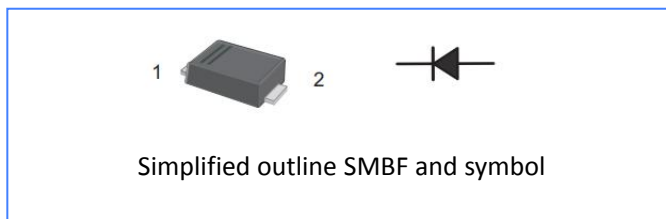

Pinning

PIN	DESCRIPTION
1	Cathode
2	Anode

Absolute Maximum Ratings And Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	US2ABF	US2BBF	US2DBF	US2GBF	US2JBF	US2KBF	US2MBF	Units
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at Tc = 125 °C	I _{F(AV)}	2							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I _{FSM}	50							A
Maximum Instantaneous Forward Voltage at 1 A	V _F	1.0			1.3	1.65			V
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta =125 °C	I _R	5 100							μ A
Maximum Reverse Recovery Time ⁽¹⁾	trr	50			75				ns
Typical Thermal Resistance ⁽²⁾	RθJA	60							°C/W
	RθJC	18							
Operating and Storage Temperature Range	T _J , T _{stg}	-55 ~ +150							°C

(1) Measured with $I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$, $I_{rr} = 0.25\text{ A}$

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas

Rating And Characteristic Curves

Fig.1 Forward Current Derating Curve

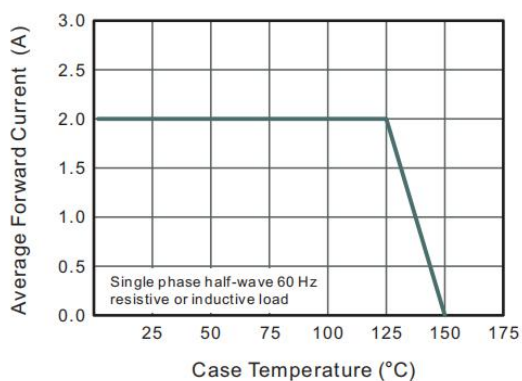


Fig.2 Typical Reverse Characteristics

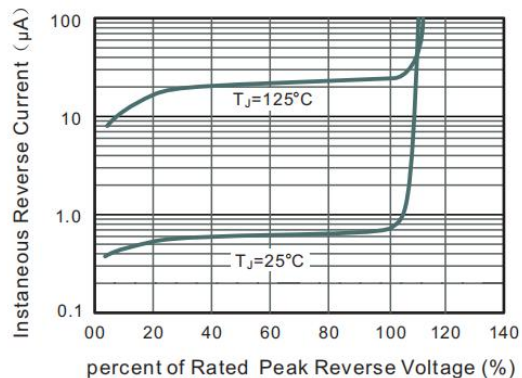


Fig.3 Typical Forward Characteristics


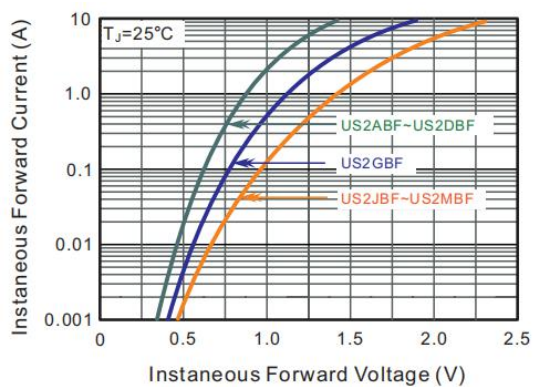



Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

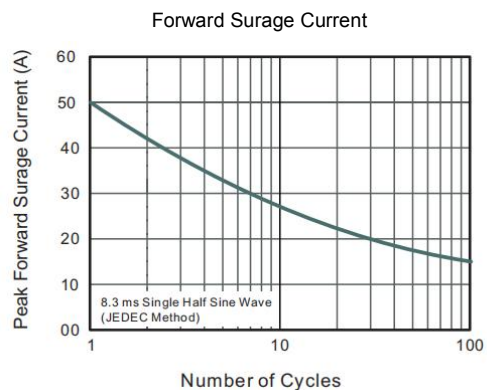

Package Outline

Plastic surface mounted package; 2 leads

SMBF

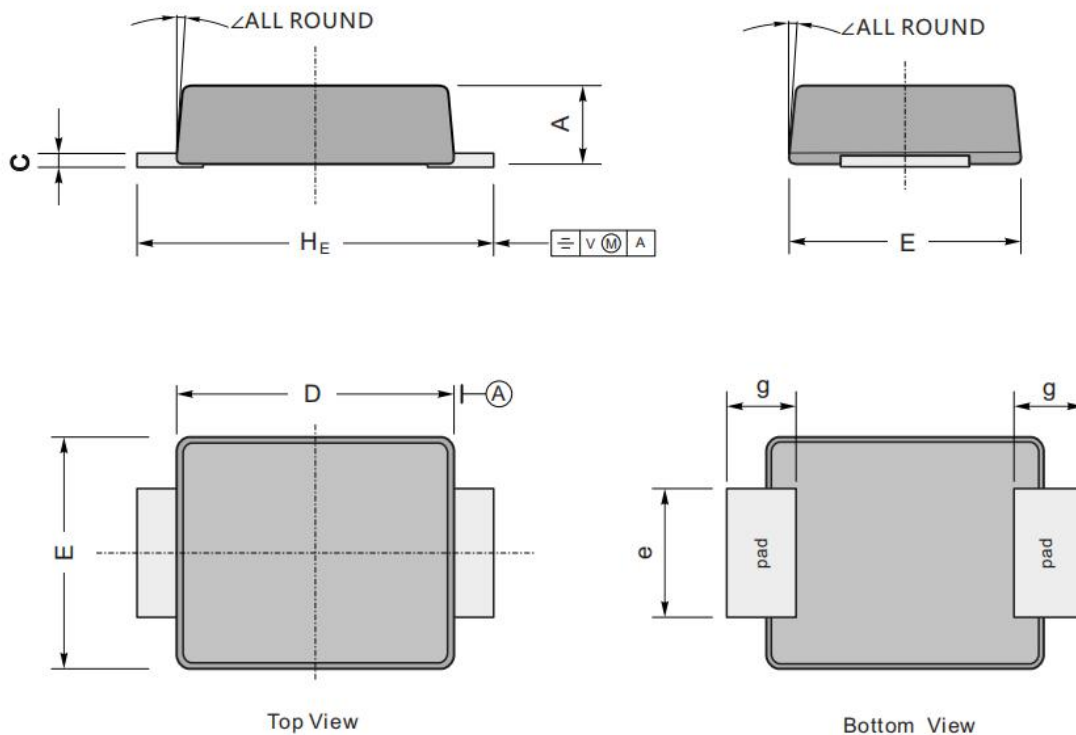

UNIT		A	C	D	E	e	H _E	g	∠
mm	max	1.3	0.26	4.4	3.7	2.2	5.5	1.0	9°
	min	1.1	0.18	4.2	3.5	1.9	5.1		
mil	max	51	10	173	146	86	216	40	
	min	43	7	165	138	75	200		

The recommended mounting pad size

